

Tow Camera System

Powered by Rayfin Single Channel Inspection Software




High-resolution integrated solution for seabed transects, visual surveys and inspection

The comprehensive system has a maximum operating depth of 380m, utilizing Kevlar tow cable up to 410m. It features a high-specification Rayfin Coastal camera that streams uninterrupted real-time HD and 4K video with simultaneous 12.3MP digital stills, and topside recording.

Applications

- Seafloor Mapping
- Marine Observations
- Fisheries Research
- Conservation
- Offshore Infrastructure Inspection
- Underwater Archaeology
- Search and Rescue



Features

- Environmentally conscious design
- Real-time HD & 4K video, 12.1MP stills and video recording
- Built-in adjustable stills capture rate up to 2 Hz
- Max operating depth of 380m
- Adjustable camera/lights position
- Variable light intensity
- Optional scaling laser

Total System Includes

- 1 x Tow camera frame with self-adjusting passive altitude control
- 1 x HD/4K & 12.3MP stills Rayfin Coastal camera
- 1 x Built-in DVR with overlays, annotations, and voiceover capabilities
- 1 x Built-in altimeter, depth, NMEA, time/date sensor, tilt, roll
- 2 x Aquorea LEDs with strobe and lamp capabilities
- 1 x MantaRay parallel dot lasers for precise measurement (optional)
- 2 x Skate line lasers for scaling (optional)
- 1 x Winch cable for efficient deployment (optional)



Advanced software provides full control of the camera, lights, and lasers while saving users time in post-processing through instant transfer and organization of media, data, and files, with automated logging of timestamps, NMEA, EXIF data, and sensor information.

This fully equipped system includes a digital video recorder for real-time HD and 4K video recording. The system features Rayfin Rapid Digital Imaging (RDI) to capture high-resolution digital stills with digital zoom capabilities, surpassing traditional video frame grabs and enabling 3D modeling and photogrammetry.

Designed for ease of use and durability, the rugged frame is constructed from stainless steel and epoxy-coated aluminum, ensuring reliability in harsh ocean conditions. The system's components are pre-assembled, simplifying setup for users, and designed for easy adjustments in the field.

Specifications


Tow Camera System	
Tow Frame Weight	49.4 kg (in air) 9 kg buoyant without drag chain (in water)
Tow Frame Dimensions	1.20m wide x 0.48m diameter
System Max. Operating Depth	380m
LED Lumens	16,000 lumens (lamp) 50,000 lumens (strobe)
Digital Stills	12.3 Megapixel
Video Resolution	HD Up to 4K
Real-Time Streaming	1080p HD/4K video for visualization and real-time recording
DVR Recording	Records real-time video and incorporates video annotation and system control software

Specifications subject to change without notice. © 2010 SubC Control Ltd. All rights reserved. Rev. September 2024



“We’ve been impressed with the software’s capabilities. Features like the visual EXIF GPS indicator are incredibly helpful. The collaborative approach has truly enhanced our project workflow and it’s great to have such a responsive and supportive partner in SubC Imaging.”

*Katie Duncan, Project Environmental Scientist, Fugro
Tow Camera System User*

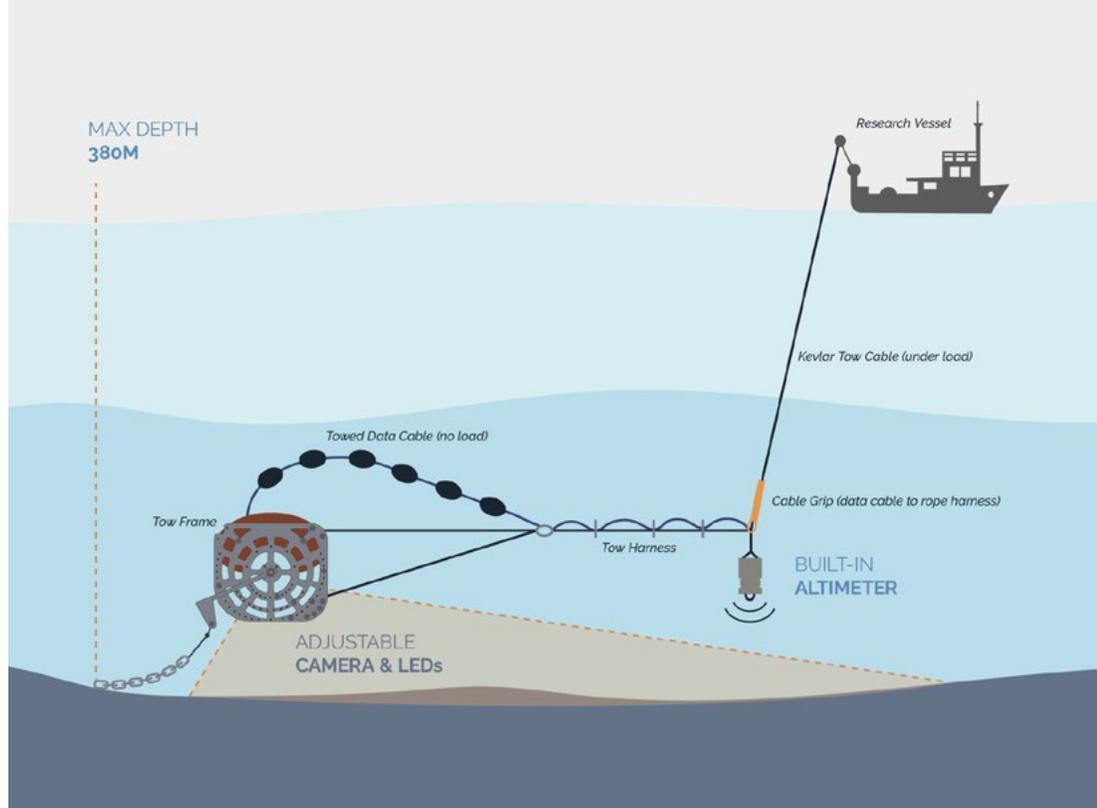

Our equipment is available for direct purchase or rental. To speak with an expert or schedule a demo please [contact us](#).

subcimaging.com | 1-709-702-0395 | team@subcimaging.com